




Deck-Drive™ DHSD HARDWOOD-TO-HARDWOOD Screw

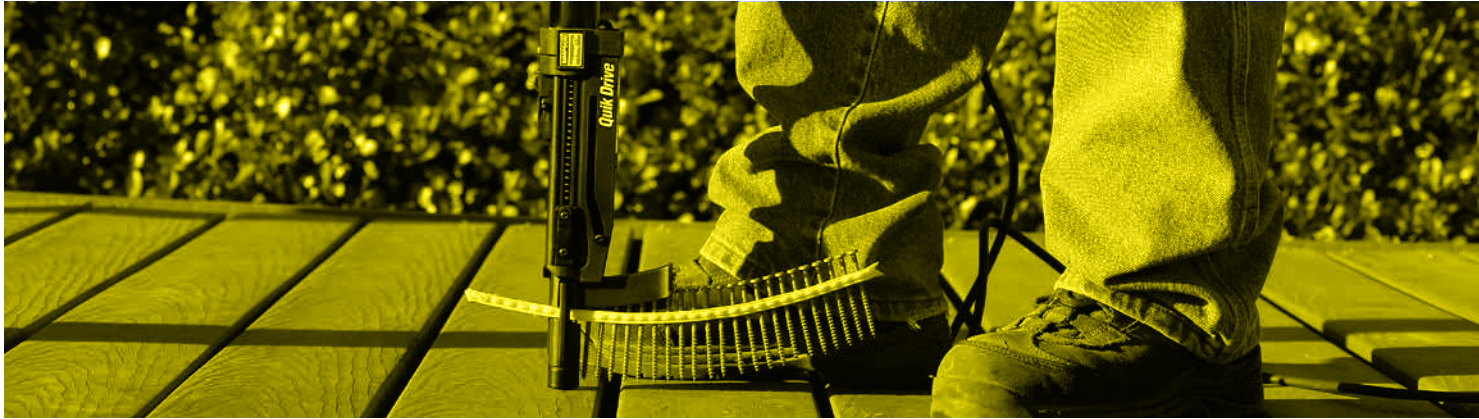

The DHSD Hardwood-to-Hardwood screw is ideal for hardwood decking applications and is specifically designed to penetrate the hardest timber with ease. The unique drill point virtually eliminates splitting all without the need of predrilling. The raised compact head delivers a professional finish for a decorative style deck.

Features

- Raised countersinking head
- Unique ribbed shank provides greater strength and holding power
- Design virtually eliminates splitting of hardwood decking
- No predrilling required in hardwood joists

Application


- Hardwood to hardwood decking applications
- Maximum recommended board thickness:
50 mm screw — 20 mm; 60 mm screw — 25 mm

Finish

- **305 Stainless Steel**



This screw is also available loose for hand-drive installation. See page 147 for details.



Raised compact head for a decorative finish



Ribbed shank provides greater holding power



Hardwood drill point virtually eliminates splitting and the need for predrilling

Collated Screws for the Quik Drive® System

10 Gauge Hardwood-to-Hardwood Screw

Bit(s) included with every box of screws

Model No.	Diameter	Length	Thread	Point	Box Qty	Drive Size	Replacement Bit	PRO 200	PRO 250	PRO 300
SSDHSD50S	4.9mm	50mm	Coarse Threads	Hardwood Drill Point	1,000	#2 Square Drive	BIT2S-RC10	—	✓	✓
SSDHSD60S		60mm						—	✓	✓