



DTH Trim-Head Screw



The DTH trim-head timber screws are ideal for timber-to-timber applications that require a clean and less noticeable finish.

Features



- Trim head with nibs for easy countersinking (Nibs on Class 3 screws)
- Coarse threads
- Box threads (SSDTH2SA)

Application

- Finishing
- Millwork
- Trim

Finish

- Class 3 Mechanically Galvanised (DTHG2SA)
- Quik Guard® coating (DTHQ Series)
- **305 Stainless Steel** (SSDTH2SA)

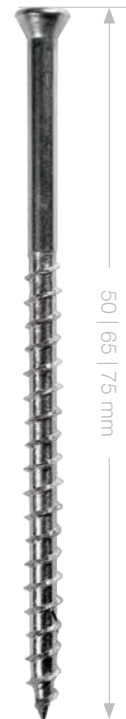

Trim head ideal for a less noticeable fixing



Box thread greatly reduces driving torque. (SSDTH2SA)



Type 17 point ideal for timber applications (Class 3 screws)

Collated Screws for the Quik Drive® System

8 Gauge Trim-Head Screw

Bit(s) included with every box of screws

Model No.	Diameter	Length	Thread	Point	Box Qty	Drive Size	Replacement Bit	PRO 200	PRO 250	PRO 300
DTHG2SA	4.2mm	50mm	Coarse Threads	Type 17	2000	#2 Undersize Square Drive	BIT2SU-RC10	✓		
DTHQ212S		65mm			1500				✓	
DTHQ3S		75mm			1000					✓
SSDTH2SA		50mm	Box Threads	Sharp	2000	#2 Square	BIT2S-RC10	✓		

These coated fasteners possess a level of corrosion resistance that makes them suitable for use in some exterior and corrosive environments and with some preservative-treated timber. For applications in higher-exposure applications, consider Type-300 series stainless-steel fasteners for superior corrosion resistance. See pages 20-26 for additional important information before selecting a fastener for a specific application.