

TP Tie Plates

TP tie plates are ideal for a range of reinforcement and repair applications. They can be fastened with nails or Strong-Drive® SD Connector screws.

- Make stronger splices without additional timber or toenailing.
- A range of sizes for any project.



Material: 1mm thick.

Finish: Galvanised. See Corrosion Information.


Installation

- Use all specified fasteners. See General Notes.


Typical Installation

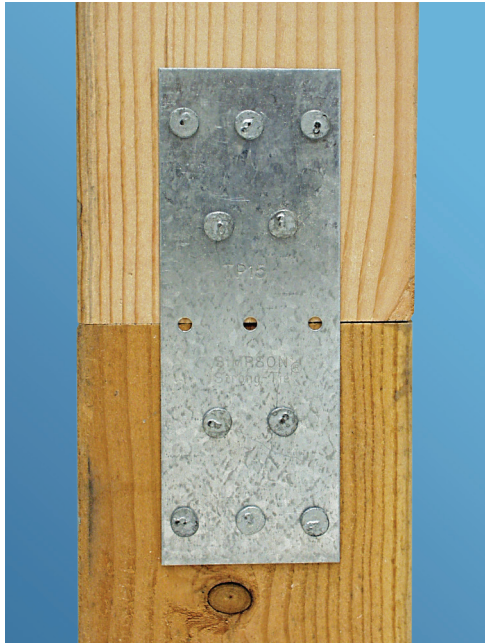


TP15

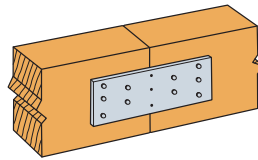


Typical TP15 installation

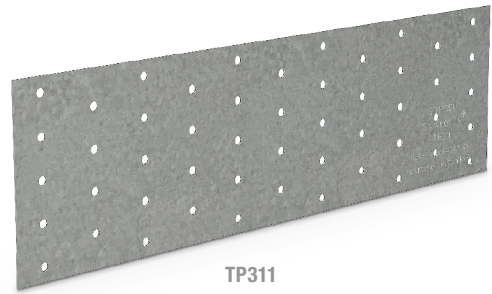


TP311




TP35




TP37

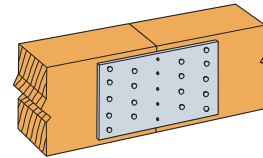


Typical TP35 installation
(TP37 similar)




TP39




TP311

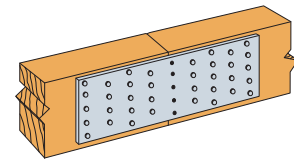

Typical TP39 installation
(TP311 similar)



TP47



Typical TP47 installation

TP Technical Data

Model No.	Dimensions (mm)		
	W	H	L
TP15	45	125	125
TP35	80	125	125
TP37	80	180	180
TP39	80	230	230
TP311	80	280	280
TP47	105	180	180